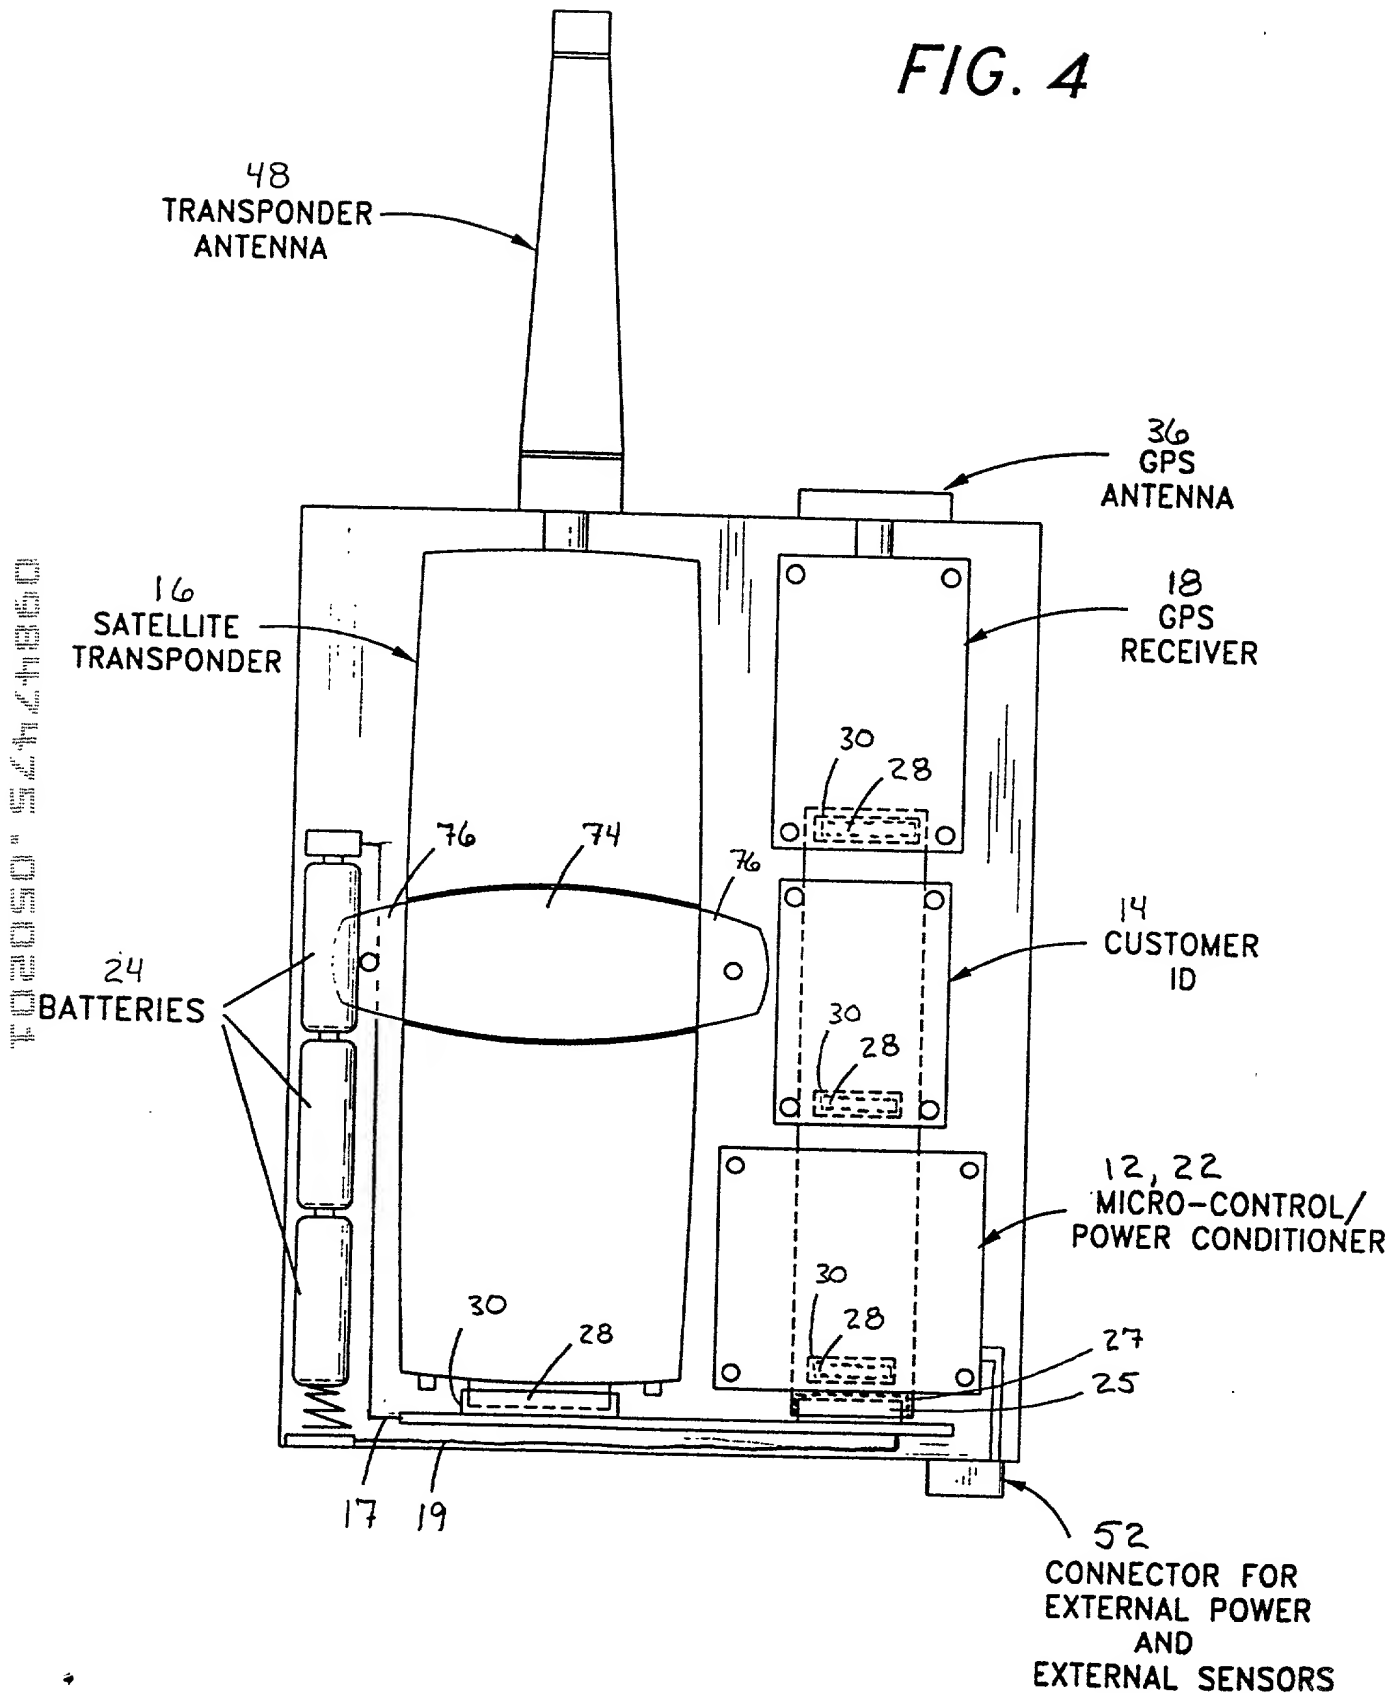


FIG. 1

FIG. 1 is a perspective view of a rectangular device 56. On the top surface of the device, there is a circular component 36. A vertical rod 48 extends upwards from the center of the circular component 36.

FIG. 3 is an exploded perspective view of the assembly. It shows the main frame 58, which includes a top rail 62 and a bottom rail 66. A vertical support 24 is shown to the right of the frame. A front panel 60 is shown to the left. A central component 74 is shown in the middle, with a top section 76 and a bottom section 72. A series of components 12, 14, 18, and 22 are shown to the left of the central component. A series of components 21, 23, 25, 30, and 36 are shown below the central component. A series of components 48, 52, 56, 68, 70, 78, 80, 82, 84, and 86 are shown to the right of the central component. Dashed lines indicate the assembly path for each component.

FIG. 4



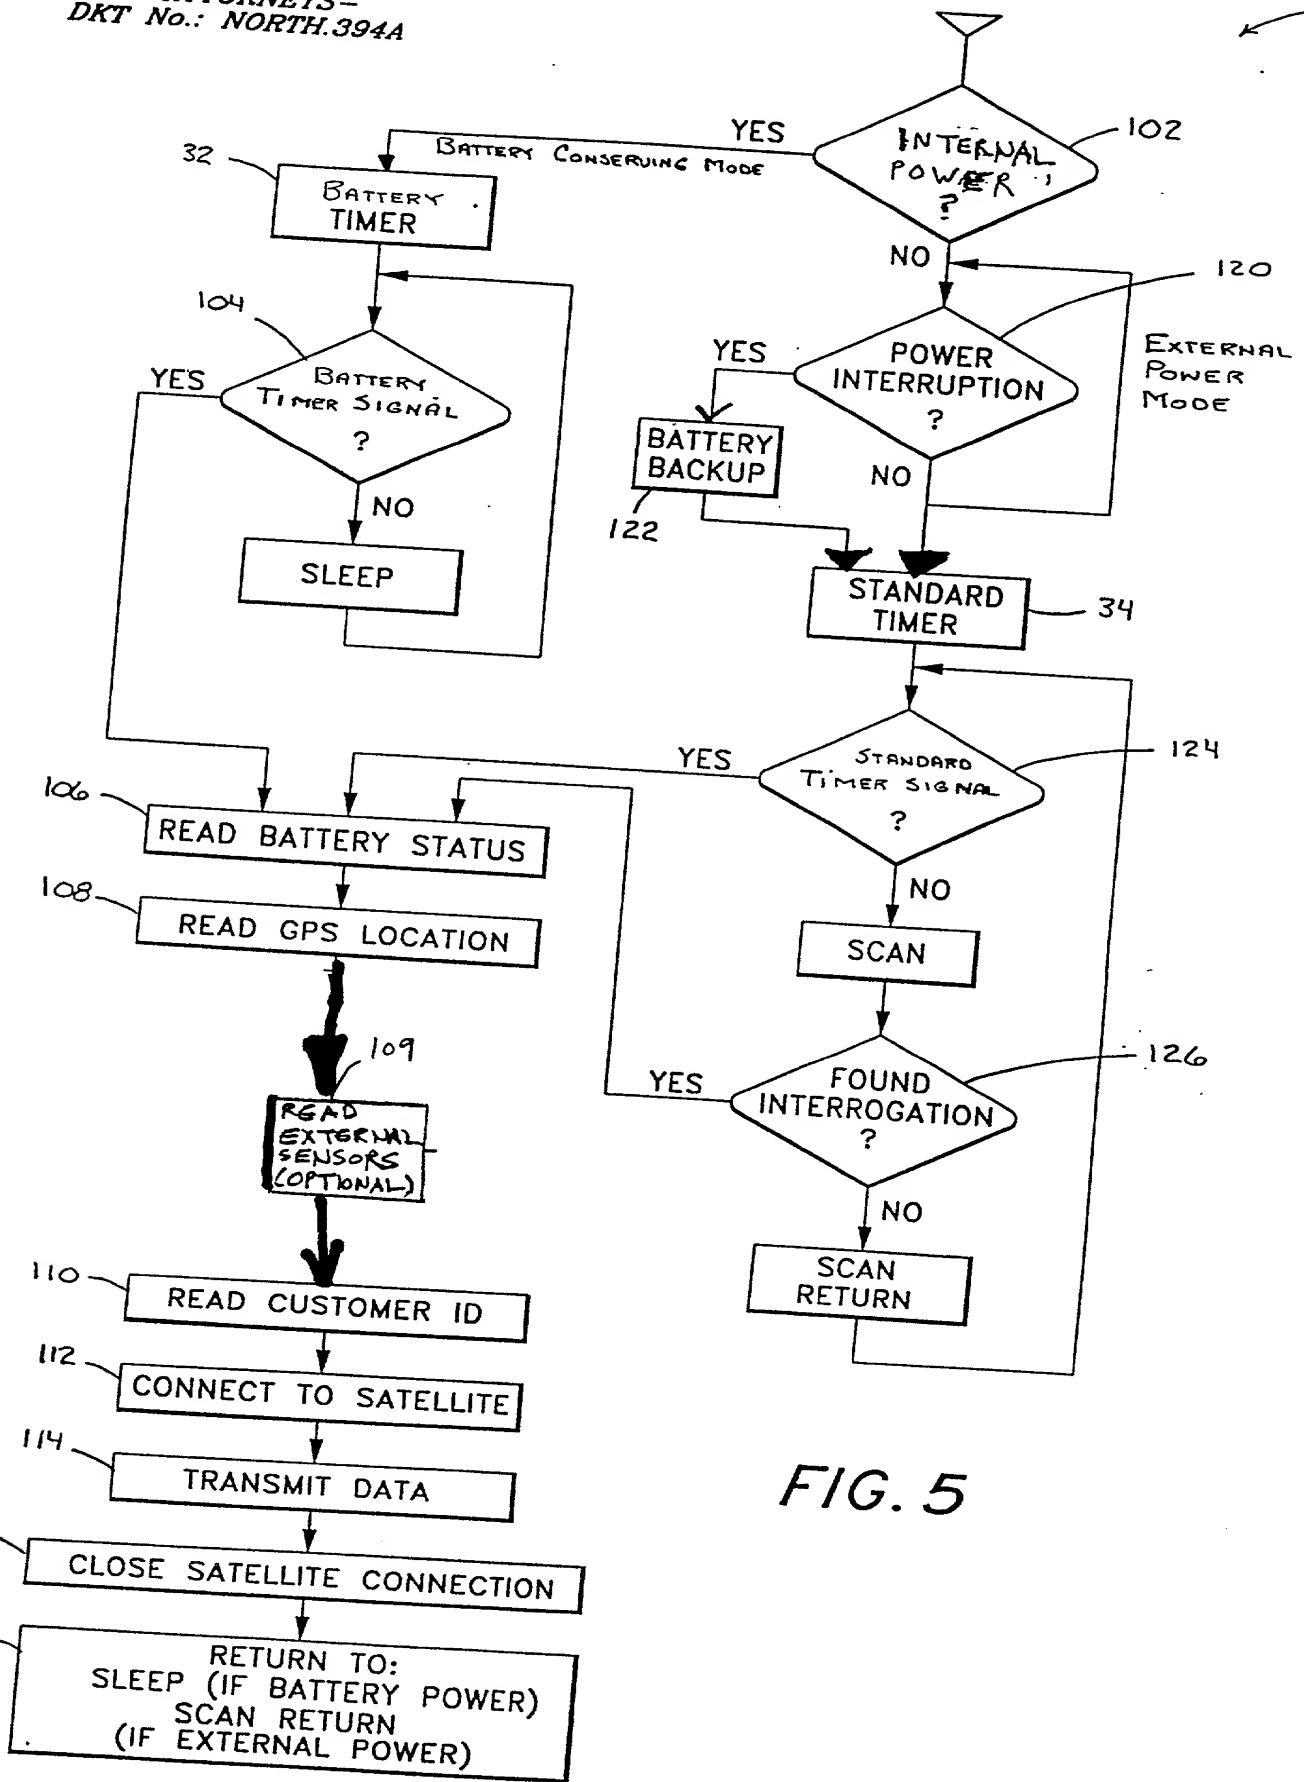


FIG. 5

09847475.050201

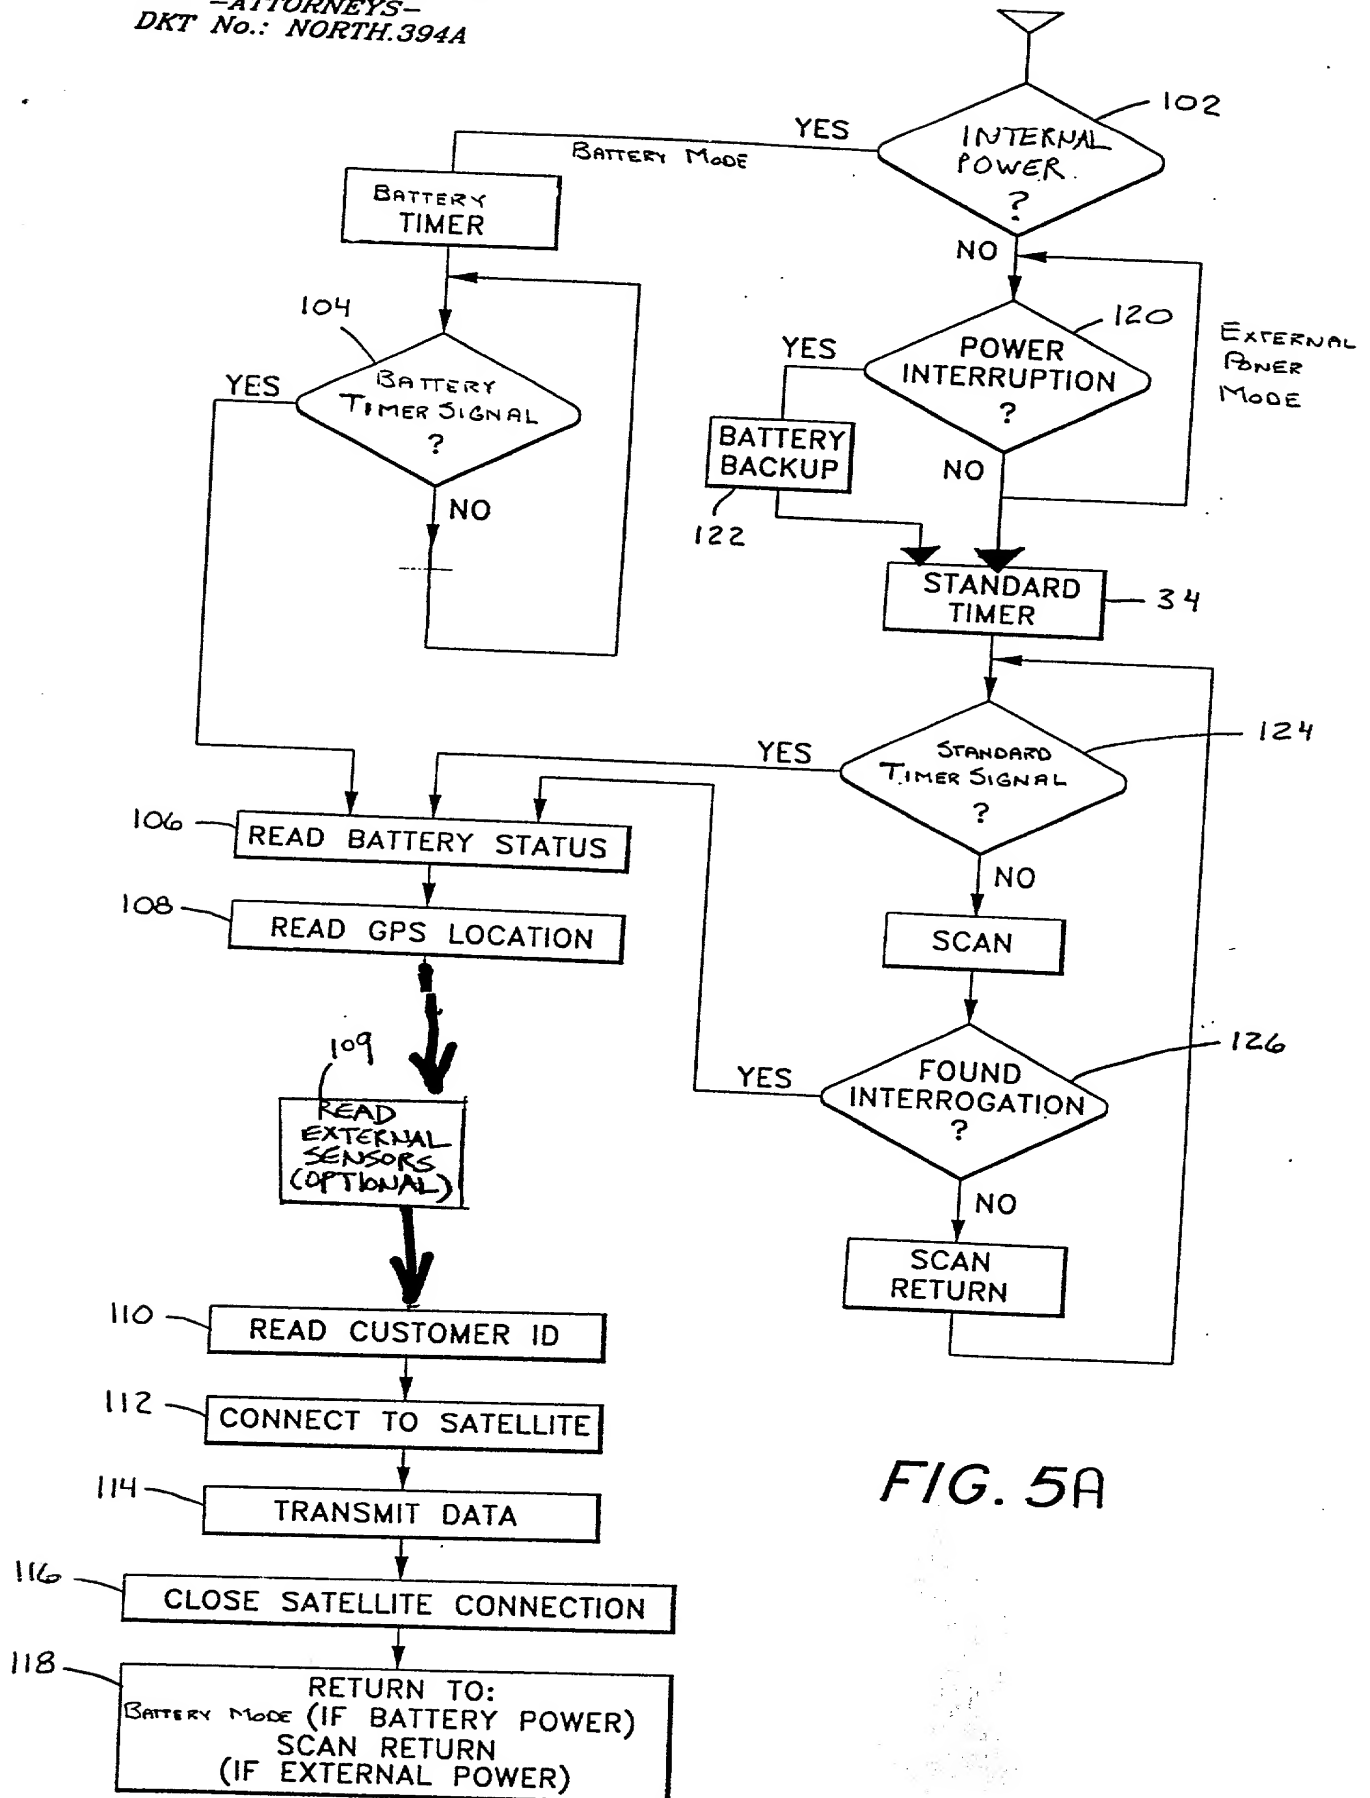


FIG. 5A

09847475-050201

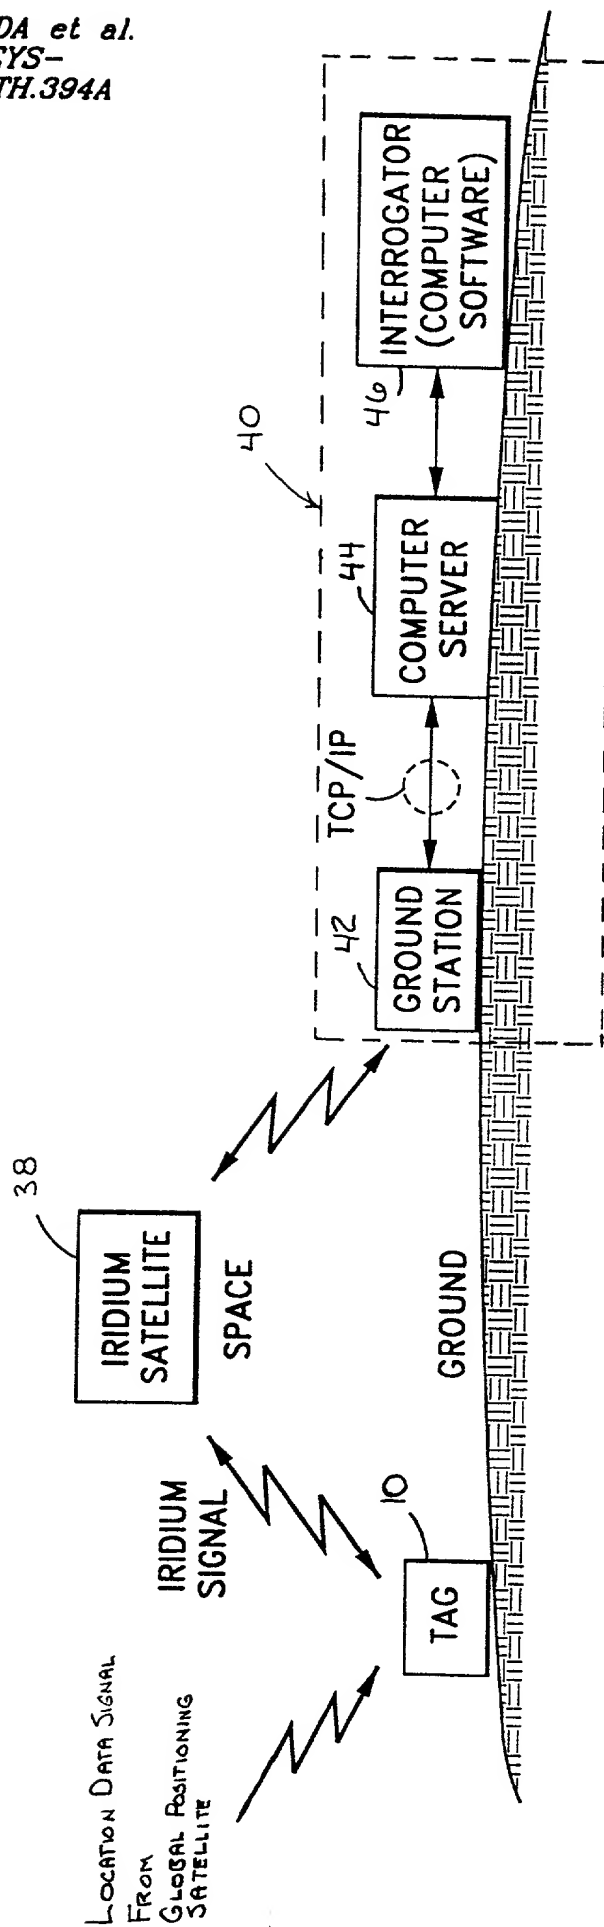


FIG. 6





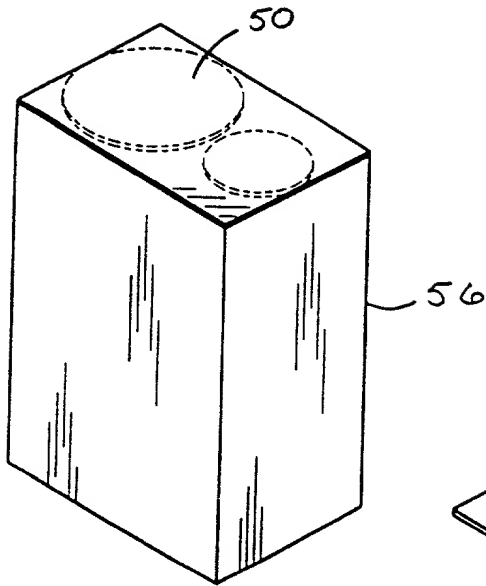


FIG. 7

FIG. 8

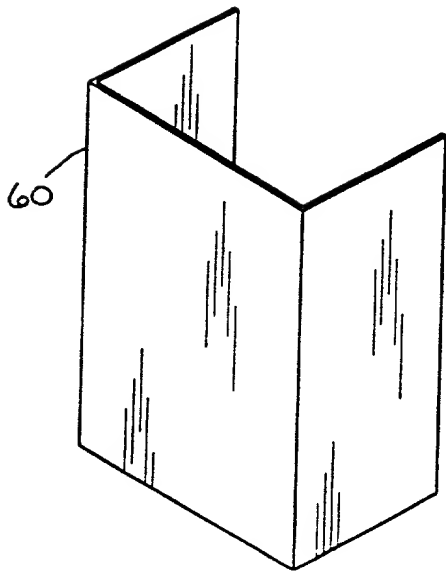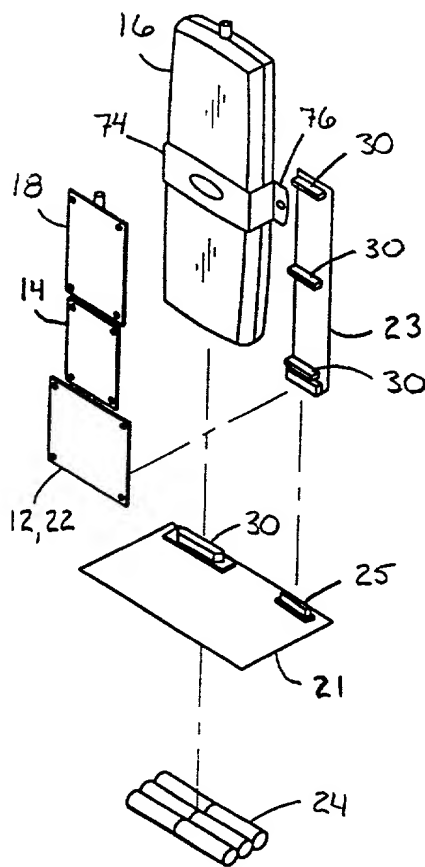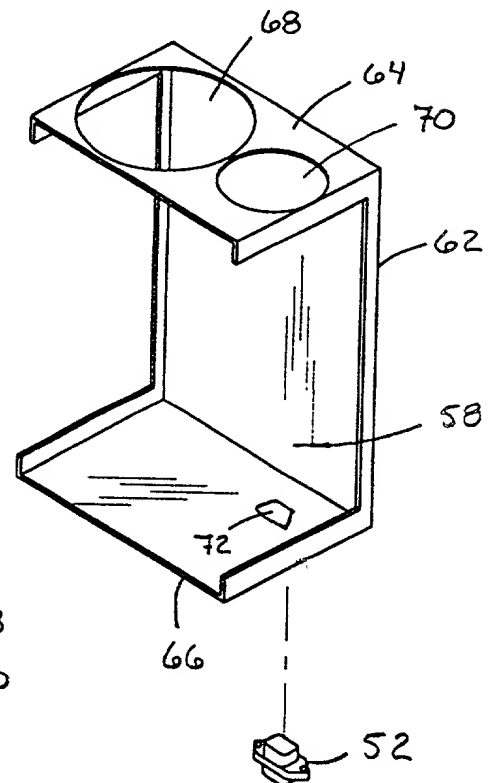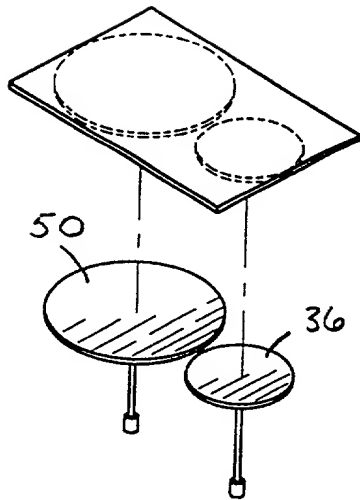

034745-0501
 102050-52424850

FIG. 9

